


WORLD'S FIRST 4K UHD EX-SDI DVR



Alarm In / Out

One Touch HDD installation(lockable)

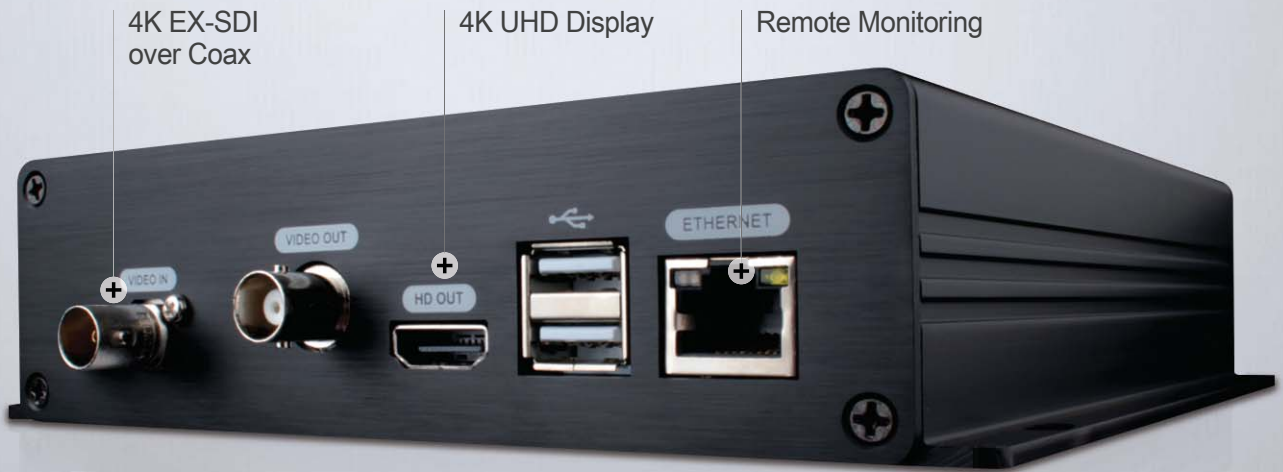

4K EX-SDI over Coax

4K UHD Display

Remote Monitoring

4K / EX-SDI / HD-SDI Hybrid Solution

Compact size and slick design
Seamless smooth 4K video flow on Live and Playback
Supports various video input signal



4K EX-SDI
30fps@2160p
Over Coax



Enhanced
Data Writing
Speed & Stability



One touch HDD
installation



Surveillance
Medical
Broadcasting

SPECIFICATION

MODEL	U8201UH
Operating System	Embedded Linux
Signal Format	4K, EX-SDI, HD-SDI
Memory	2GB DDR3 Memory
Video Input	1
Video Output	Composite x 1
HDMI	1 (Max. 3840 x 2160)
Recording Rate	Max. 30fps@2160p (4K)
Audio Input / Output	1 Input / 1 Output
Alarm Input / Output	1 Input / 1 Output (Relay)
GPS	1 (2.5pi Phone Jack)
Ethernet	10 / 100 / 1000 Mbps Ethernet (RJ-45)
Master Alarm	-
USB 2.0	2 x USB
User Interface(GUI / Control Device)	Mouse, PTZ Control
Archive File Format	EXE (Video Clip) / AVI (Video Clip) / JPEG (Still Image)
NTP Server	Yes
GMT Time Zone	Yes
Auto DST	Yes
Recording Qualities	Super / High / Standard / Low
Recording Modes	Continuous / Alarm / Motion / Emergency
Motion Detection	Yes (30 x 20)
Playback Control	x1, x2, x4, x8, x16, x32, x64
PTZ Control	RS-485 / 422 Terminal Block
Text Insertion (POS)	1
Multi Language	English / Korean / Japanese / Czech / Dutch / Finnish / French / German / Italian / Polish / Portuguese / Russian / Spanish / Thai / Turkish / Vietnamese
Central Monitoring Station	CMS Pro (Windows) / iCMS (Mac) / Web Client Pro
Mobile Viewer	iPad / iPhone / Android
Primary Storage	1 x SSD or 1 x HDD (2.5")
Clip Copy Storage	USB Memory Stick
Dimension (WxHxD)	165mm x 170mm x 43mm / 6.49inch x 6.69inch x 1.69inch
Operating Temperature	5 °C~50 °C / 41 °F~122 °F
Operating Humidity	0% ~ 90%
Power Adapter	12V, 3A (36W)


* Design and specifications are subject to change without notice.

Dimension


U8201



Front

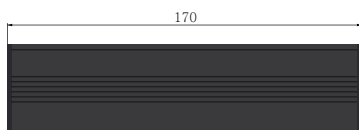

Side

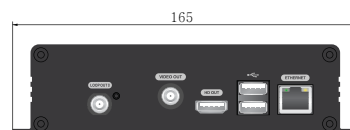

Rear

Unit : mm

System Interconnection

